


## JLSZY-15W OUTDOOR THREE PHASE METERING KIT (COMBINED TYPE)

This combined transformer (Metering kit) which is combined by current transformer and potential transformer. It can measure the active and reactive electricity directly for the high voltage power line. It suits to the 50/60Hz electricity measurement for the active and reactive energy and relay protection. It can be used in the outdoor electric utility substation and power transformer substation, which can instead of the oil-immersed type combined transformer.

Description of product's type:

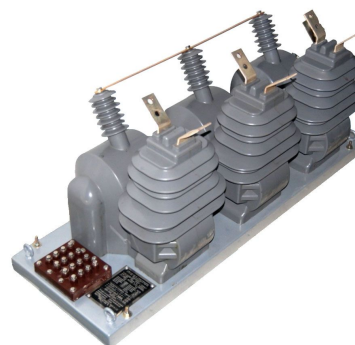

### Technical specification

- (1) The rated voltage: 15/42/95kV (please indicate it if it need BIL110kV or BIL150kV);
- (2) Accuracy class: CT: 0.2s, 0.5s, 0.2; PT: 0.2, 0.5
- (3) Standard: Instrument transformers - Part 1: Current transformers (IEC 60044-1:2002)  
 Instrument transformers - Part 2: Potential transformers (IEC 60044-3:2002)  
 Instrument transformers - Part 3: Combined transformers (IEC 60044-3:2002)
- (4) Rated frequency: 50Hz or 60Hz;
- (5) Technical data

Ratio (A)	Class	Capacity	BIL	Tender No.
5-10/5A	CT: 0.5 (IEC) PT: 0.5S (IEC)	CT: 12.5VA PT: 50VA	15/38/95kV	TMCMT-33B
10-20/5A				TMCMT-33C
15-30/5A				TMCMT-33A / TMCMT-33ARDS
20-40/5A				TMCMT-33D
25-50/5A				TMCMT-33E
40-80/5A				TMCMT-33F
50-100/5A				TMCMT-33G
100-200/5A				TMCMT-33I
150-300/5A				TMCMT-33H
300-600/5A				TMCMT-33J
500-1000/5A				TMCMT-33K
800/16005A				TMCMT-33L
200-400/5A				CT: 0.5 (IEC) PT: 0.5S (IEC)

Outline dimension drawing:

